ARTIFICIAL NEURAL NETWORK MODEL TO PREDICTION WATER QUALITY IN SAEN SAEP CANAL

S. KETCHAYA

Faculty of science and technology, Suan Sunandha Rajabhat University, Dusit, Bangkok 10300 Thailand
E-mail: sirilak.ke@ssru.ac.th, s.ketchaya@gmail.com

Abstract - Water quality is a subject of ongoing concern. Deterioration of water quality has initiated serious management efforts in many countries. This study endeavors to automatically classify water quality. The water quality classes are evaluated using 6 factor indices. These factors are pH value (pH), Dissolved Oxygen (DO), Biochemical Oxygen Demand (BOD), Nitrate Nitrogen (NO_3N), Ammonia Nitrogen (NH_3N) and Total Coliform (T-Coliform). The methodology involves applying data mining techniques using multilayer perceptron (MLP) neural network models. The data consisted of 11 sites of Saen Saep canal in Bangkok, Thailand. The data is obtained from the Department of Drainage and Sewerage Bangkok Metropolitan Administration during 2011-2015. The results of multilayer perceptron neural network exhibit a high accuracy multilayer perception rate at 94.23% in classifying the water quality of Saen Saep canal in Bangkok Subsequently, this encouraging result could be applied with plan and management source of water quality.

Keywords - Artificial neural network, prediction, water quality

I. INTRODUCTION

Surface water contamination from agricultural and urban runoff and wastewater discharges from industrial and municipal activities is of major concern to people worldwide. Classical models can be insufficient to visualize the result because the water quality variables used to describe dynamic pollution sources are complex, multivariable, and nonlinearly related. Artificial intelligence techniques with the ability to analyses multivariate water quality data by means of a sophisticated visualization capacity can offer an alternative to current models [1].

The aim of this investigation is to find an automated methodology that can quickly and efficiently classify the water quality of Saen Saep canal in Bangkok. Recently, several machine learning algorithms have been used to find patterns to classify water quality such as decision tree and artificial neural networks (ANNs). Classification and regression tree (CART) is a type of decision tree methodology. Classification and regression tree have the advantage of expressing regularities explicitly and thus being convenience to inspect for water quality validity [3]. Artificial Neural Networks have become the central focus of many scientific disciplines, such as ecology [5], analytical chemistry [6], and water quality. Literature on modeling water quality using ANNs includes [7], [8], [9], [10]. In this study, using multilayer perceptron neural network to find efficiently model classify water quality of canals in Bangkok.

This paper is organized as follows: Section II describes the related work concerned this research. Section 3 describes the materials used in the experiments. Section 4 demonstrated the methodologies used in the experiments. The experiments and results are shown in Section 5. Finally, Section 6 concludes the paper.

II. RELATED WORK

A relatively new concept in river water flow and quality modeling, the use of these ANNs allow non-linear relationships between variables to be 'learnt' through repeated presentation of input-output data sets. The ANN technique is well suited to model complex problems where the relationship between the model variables (input-output) is unknown [28], [29]. Applications of ANNs to various aspects of environmental modeling are widely reported in the literature. However, although ANNs have already been shown to produce models that perform well with respect to conventional models [30], [31], [32], [33], [34], [35], [36] their application is still restricted to the research in environment.

In recent years, modern techniques have been proposed as efficient modeling tools. Hence, there is always an attempt to investigate the most efficient technique for a particular application. Gamal El-Din [25] applied Artificial Neural Networks (ANNs) to model wastewater treatment processes. This was a comparative study between conventional deterministic models and ANNs. They observed, in addition to the information contained in the conventional models, that neural networks contained a great deal of extra information with regard to the system being modeled. S.Areerachakul et al. [14] analyzed and compared the performances of neural network (NN) with Classification and regression trees (CART) models in classify water quality of

canals in Bangkok. Jain [26] employed neural networks to model the short-term water demand at the Indian Institute of Technology (IIT), Kanpur, India. Six network models, five regression models and two time series models were developed and compared. All of the network models, generally, displayed better performance when measured against other models. Maier [27] conducted a study reviewing 43 research papers in which neural networks were utilized for prediction and forecasting of water resources variables. They observed that network models always work well. Their usages in the study of water are growing due to their ability to handle large amounts of non-linear, non-parametric data.

III. MATERIALS

Data and surface water quality standard are described in this section.

A. Data and Site description

Saen Saep canal consists of 11 sampling sites. This network of canal is important for the daily life of the people in Bangkok. This canal is used for consumption, transportation and recreation. Therefore, the rapid growths of industry, condominiums, high-rise and low-rise buildings, and other infrastructures, have had a significant effect on the canal water quality. In this study, carries an element of novelty since it is the first one to carry out parameter of water quality prediction using computational intelligence techniques for Saen Saep canal in Bangkok, Thailand. The water quality data are provided by Department of Drainage and Sewerage Bangkok Metropolitan Administration during 2007-2011. There are 520 records of data. Each record consists of 6 parameters namely; pH value (pH), Dissolved Oxygen (DO), Biochemical Oxygen Demand(BOD),Nitrate Nitrogen (NO_3N), Ammonia Nitrogen (NH_3N) and Total Coliform (T-Coliform). The classifications of canal water quality are based on surface water standards [12].The lower the number of class, the better the quality of water quality.

B. Surface Water Quality Standards

Many parameters can influence the surface water quality. Six parameters are selected for the investigations. In Thailand, the surface water quality can be classified as in Table 1 [13]. Generally, surface water quality can be divided into five classes; class I , extra clean fresh surface water resources use for conservation that are not necessary to pass through water treatment processes and require only ordinary processes for pathogenic destruction and ecosystem conservation where basic organisms can breed naturally; class II, very clean fresh surface water resources use for consumption that require ordinary water treatment processes before use by aquatic organisms in conservation, fisheries and recreation; class III, medium clean fresh surface water resources use for consumption, but are passed through an ordinary treatment process before use; class IV, fairly clean fresh surface water resources use for consumption, but requires special water treatment processes before use; and class V, the sources which are not within class I to class IV and are used for navigation[14].

Pollutants Index	Class I	II	III	IV	V
pH (mg/l)	<5	5-9	5-9	5-9	>9
DO (mg/l)	>6	6	4	2	<2
BOD (mg/l)	<1.5	1.5	2	4	>4
NO_3N (mg/l)	<5	5	5	5	>5
NH_3N (mg/l)	<0.5	0.5	0.5	0.5	>0.5
T-Coliform (MPN)	<50	50	200	>200	>200

Table I: Surface Water Quality Standards

IV. METHODOLOGY

In this section, we demonstrated Multilayer perceptron neural network

A. Multilayer perceptron Network

The artificial neural network (ANN) or neural network in short, is inspired by simulating the function of a human brain. A neural network can be used to represent a nonlinear mapping between input and output vectors. Neural networks are among the popular signal-processing technologies.

In 0engineering, neural networks serve two important functions: as pattern classifiers and as nonlinear adaptive filters [15], [16]. A general network consists of a layered architecture, an input layer, one or more hidden layers and an output layer [17]. Fig.1 shows a typical architecture of a multilayer perceptron network. The Multilayer perceptron (MLP) is an example of an artificial neural network that is used extensively to solve a number of different problems, including pattern recognition and interpolation [18], [19]. Each layer is composed of neurons, which are interconnected with each other by weights. In each neuron, a specific mathematical function called the activation function accepts input from previous layers and

generates output for the next layer. In the experiment, the activation function used is the hyperbolic tangent sigmoid transfer function [20] which is defined as in equation (1):

$$f(n) = \frac{1 - e^{-2s}}{1 + e^{-2s}} \quad (1)$$

where $s_i = \sum_{i=1}^{n} W_i X_i$, in which W_i are weights and X_i are input values.

The MLP is trained using the Levenberg–Marquardt technique as this technique is more powerful than the conventional gradient descent techniques [18].

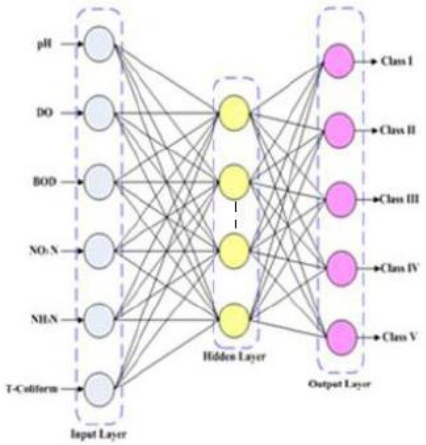


Fig 1. A typical Multilayer Perceptron ANN Architecture

The Levenberg-Marquardt (LM) algorithm [21] is the most widely used optimization algorithm. It outperforms simple gradient descent and other conjugate gradient methods in a wide variety of problems. If a function V(x) is to be minimized with respect to the parameter vector $\underline{x}$, then Newton's method would be:

$$\Delta \underline{x} = -[\nabla^2 v(\underline{x})]^{-1} \nabla v(\underline{x}) \quad (2)$$

where $\nabla^2 v(\underline{x})$ is the Hessian matrix and $\nabla v(\underline{x})$ is the gradient. If $v(\underline{x})$ reads:

$$v(\underline{x}) = \sum_{i=1}^{N} e_i^2(x) \quad (3)$$

then it can be shown that:

$$\nabla v(\underline{x}) = J^T(\underline{x}) \underline{e}(\underline{x}) \quad (4)$$

$$\nabla^2 v(\underline{x}) = J^T(\underline{x}) J(\underline{x}) + S(\underline{x}) \quad (5)$$

where $J(x)$ is the Jacobian matrix

$$J(x) = \begin{bmatrix} \frac{\partial_{e1}(\underline{x})}{\partial x_1} & \frac{\partial_{e1}(\underline{x})}{\partial x_2} & \cdots & \frac{\partial_{e1}(\underline{x})}{\partial x_N} \\ \frac{\partial_{e2}(\underline{x})}{\partial x_1} & \frac{\partial_{e2}(\underline{x})}{\partial x_2} & \cdots & \frac{\partial_{e2}(\underline{x})}{\partial x_N} \\ \vdots & \vdots & \ddots & \vdots \\ \frac{\partial_{eN}(\underline{x})}{\partial x_1} & \frac{\partial_{eN}(\underline{x})}{\partial x_2} & \cdots & \frac{\partial_{eN}(\underline{x})}{\partial x_N} \end{bmatrix} \quad (6)$$

and

$$s(\underline{x}) = \sum_{i=1}^{N} e_i \nabla^2 e_i(\underline{x}) \quad (7)$$

For the Gauss-Newton method it is assumed that $s(\underline{x}) \approx 0$, and equation (2) becomes:

$$\Delta \underline{x} = \left[J^T(\underline{x}) J(\underline{x})\right]^{-1} J^T(\underline{x}) \underline{e}(\underline{x}) \quad (8)$$

The Lavenberg-Marquardt modification to the Gauss-Newton method is:

$$\Delta \underline{x} = \left[J^T(\underline{x}) J(\underline{x}) + \mu I\right]^{-1} J^T(\underline{x}) \underline{e}(\underline{x}) \quad (9)$$

The parameter μ is multiplied by some factor (β) whenever a step would result in an increased $V(\underline{x})$.

when a step reduces $V(\underline{x})$, μ is divided by β. When the scalar μ is very large the Levenberg-Marquardt algorithm approximates the steepest descent method. However, when μ is small, it is the same as the Gauss-Newton method. Since the Gauss-Newton method converges faster and more accurately towards an error minimum, the goal is to shift towards the Gauss-Newton method as quickly as possible. The value of μ is decreased after each step unless the change in error is positive; i.e. the error increases. For the neural network-mapping problem, the terms in the Jacobian matrix can be computed by a simple modification to the back-propagation algorithm [22].

V. EXPREIMENT AND RESULTS

A. Preprocessing Data

At the initial stage of experiment, data was scaled or normalized using equation (10)

$$x_{new} = \frac{x - x_{\min}}{x_{\max} - x_{\min}} \quad (10)$$

where x is the original data point, $x_{\min}$ and $x_{\max}$ are the minimum and maximum values in the data set, respectively. This is done in order to ensure that

the minimum value in the data set is scaled to zero, and that the maximum value is scaled to one [23].

B. Experimental Data

In this study, we use the water quality data of Saen Saep canal in Bangkok, over a period of five years from 2007 to 2011. The main water quality indices include pH value (pH), Dissolved Oxygen (DO), Biochemical Oxygen Demand (BOD),Nitrate Nitrogen (NO_3N), Ammonia Nitrogen (NH_3N) and Total Coliform (T-Coliform). According to the above indices, the water quality can be classified into 5 categories based on surface water quality standards in Thailand. 520 samples are available for the analysis in water quality classification.Here, data are categorized into two sets: train or learning set, and test set. The train set is used to determine the adjusted weights and biases of a network. The test set is used for calibration, which prevents overtraining of the networks [24]. In addition, the test set can be used to measure the performance the network. Generally, a good training set obtained from available data series includes all of the extreme events. The test set should consist of a representative data set. The test set should be approximately 10-40% of the size of the training set of data [7].

C. Neural Network Model

Here, the ratio of the train and test set employed in the experiment is 70:30. This means that with 520 data record, there are 364 records for the train set and 156 records for the test set.The Levenberg-Marquardt algorithm uses input vectors and corresponding target vectors to train neural networks. All the training records were fed into the network to make it learn the potential relationships between water quality indices and their corresponding categories. Accordingly, the 6 input layer nodes represent 6 water quality indices, while the 5 output layer nodes represent the 5 different class categories. The trained neural networks can provide an output representing the specific class for each of water quality indices. The testing samples are used to verify its classification ability. Many experimental investigations are conducted. The number of hidden nodes that provided the optimal result is 9 hidden nodes. Therefore, the architecture of the network is 6-9-5. The target mean square error (MSE) is 0.001 after 1000 iterations. Equation (11) shows the mean square error.

$$MSE = \frac{1}{n}\sum_{i=1}^{n} e_i^2 \qquad (11)$$

D. Results

Fig. 2 illustrates the confusion matrix for the experiment results. The confusion matrix demonstrates information about the target (actual class of surface water standard) and the output (predicted class by the network). In the matrix, each column of the matrix represents a target (actual) class, whereas, each row represents an output (predicted) class. Performance of the neural network approach can be evaluated using data in the matrix.

The examples of interpretations include:

Vertically reading from Target Class I II and III, there are 8 records classified correctly. The accuracy percentage is 0.00%.

Vertically reading from Target Class IV, there are 26 records classified correctly. The accuracy percentage is 100.00%.

Vertically reading from Target Class V, there are 122 records classified correctly. The accuracy percentage is 99.18%.

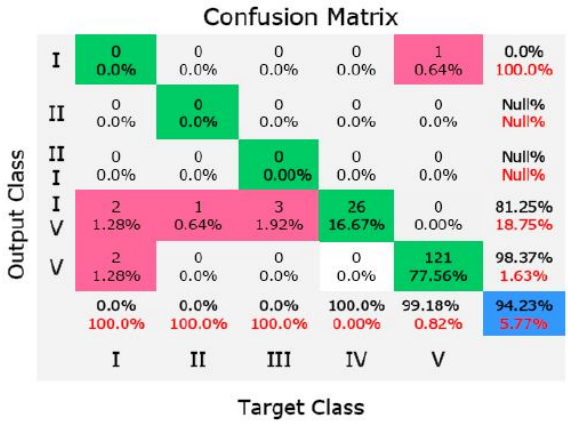


Fig 2. Confusion Matrix for Classification

Table 2 demonstrates the percentage accuracy of canal water quality classification. It can be seen that the network correctly classified 147 records from a total of 156 records. The accuracy percentage is 94.23 %

Number of Records	Number of Correctly Classified Records	Accuracy Percentage (%)
156	147	94.23

Table II: Result of Percentage Accuracy in the Test Set

CONCLUSION

In this paper, a MLP neural network using the Levenberg-Marquardt algorithm is applied to classify the water quality of Saen Saep canals of Bangkok, Thailand. The results indicate that the neural network perform with a high accuracy classification percentage of 94.23%. This encouraging result may be applied to automate water quality classifications in this area. As a result, the cost and time of water resource management could be minimized.

ACKNOWLEDGMENT

The authors would like to thank Suan Sunandha Rajabhat University for scholarship support. Thanks to the Department of Drainage and Sewerage, Bangkok Metropolitan Administration, for the provided data.

REFERENCES

[1] H. Murdun, "Application of an unsupervised artificial neural network

[2] technique to multivariant surface water quality data," The Ecological Society, 2009, 24: 163-173

[3] Walley, W.J., DZeroski ,S Biological monitoring "A Comparison between Bayesian, neural and machine learning methods of water quality classification", International Symposium on Environmental Software

[4] System, 1996.

[5] Li, Y., Jiang, J.H., Chen, Z.P., Xu, C.J., Yu, R.Q.: A New Method Based on Counter Propagation Network Algorithm for Chemical Pattern Recognition , 1999, pp. 161–170.

[6] L.Khuan, N.Hamzah and R Jailani, "Prediction of Water Quality Index(WQI) Based on Artificial Neural Network(ANN)",Conference on Research and Development Proceedings, Malasia, 2002, pp. 157-161.

[7] A.Najah, A.Elshafie,O.K arim and O.Jaffar "Prediction of Johor River Water Qualit y Parameter Using Artificial Neural Networks", Journal 0f Scientific Research, EuroJournals Publishing, 2009, pp. 422-435.

[8] Breiman L, FriedmanJH, Olshen RA, and Stone CJ "Classification and Regression Tree" Champman &Hall (Wadsworth, Inc.), Newyork, 1984.

[9] M.J. Diamantopoulou, V.Z. Antonopoulos and D.M. Papamichail "The Use of a Neural Network Technique for the Prediction of Water Quality Parameters of Axios River in Northern Greece", Journal 0f Operational Research, Springer-Verlag, Jan 2005, pp. 115-125.

[10] S.Areerachakul and S.Sanguansintukul "Water Classification Using Neural Network: A Case Study of Canals in Bangkok, Thailand", The 4th International Conference for Internet Technology and Secured Transactions (ICITST-2009), United Kingdom, 2009.

[11] Department of Drainage and Sewerage Bangkok Metropolitan Administration, http://dds.bangkok.go.th/wqm/thai/home.html

[12] Simon Haykin, "Neural Networks:A Comprehensive foundation second edition ", Pearson Prentice Hall, Delhi India, 2005.

[13] Ministry of Natural Resources and Environment: http://www.mnre.go.th/

[14] S.Areerachakul and S.Sanguansintukul "Classification and Regression Trees and MLP Neural Network to Classify Water Quality of Canals in Bangkok, Thailand", International Journal of Intelligent Computing Research (IJICR), 2010.

[15] D.Marquardt, "An Algorithm for Least Squares Estimation of Non-Linear Parameter" , J. Soc. Ind. Appl.Math., pp. 1963.

[16] L.Fausett, "Fundamentals of Neural Networks Architecture.Algorithms and Applications", Pearson Prentice Hall, USA, 1994.

[17] M.J. Diamantopoulou, V.Z. Antonopoulos and D.M. Papamichail "The Use of a Neural Network Technique for the Prediction of Water Quality Parameters of Axios River in Northern Greece", Journal 0f Operational Research, Springer-Verlag, Jan 2005, pp. 115-125.

[18] D. Anguita, S.Ridella and F.Rivieccio, "K-folds Generalization Capability Assessment for Support Vector Classifiers", Proceeding of International Joint Conference on Neural Network , Canada,2005,PP.855-858.

[19] Li-hua Chen, and Xiao-yun Zhang, "Application of Artificial Neural Network to Classify Water Quality of the Yellow River", Journal 0f Fuzzy Information and Engineering , Springer-Verlag, Jan 2009, pp. 15-23.

[20] M.J. Diamantopoulou, V.Z. Antonopoulos and D.M. Papamichail "The Use of a Neural Network Technique for the Prediction of Water Quality Parameters of Axios River in Northern Greece", Journal 0f Operational Research, Springer-Verlag, Jan 2005, pp. 115-125.

[21] S.H.Musavi and M.Golabi "Application of Artificial Neural Networks in the River Water Quality Modeling: Karoon River,Iran", Journal 0f Applied Sciences, A sian Network for Scientific Information, 2008, pp. 2324-2328.

[22] Chi Zhou, Liang Gao and Chuanyong Peng, "Pattern Classification and Prediction of Water Quality by Neural Network with Particle Swarm Optimization", Proceedings of the 6th World Congress on Intelligent Control and Automation , China, June 2006, pp. 2864-2868.

[23] Martin T.Hagen and Mohammad B.Menhaj, "Training Feedforward Networks with the Marquardt Algorithm", IEEE Transactions on Neural Networks,vol.5, no.6,Nov 1994, pp.989-993.

[24] M.Yesilnacar, E.Sahinkaya and M.Naz "Neural network prediction of nitrate in groundwater of Harran Plain,Turkey", Journal 0f Environmental Geology, Springer-Verlag, 2007, pp. 19-25.

[25] A. Gamal El-Din, D.W Smith and M. Gamal El-Din, "Application of artificial neural networks in wastewater treatment," J. Environ. Eng Sci., pp.81-95, Jan 2004.

[26] A. Jain, A.K. Varshney and U.C. Joshi , "Short-term Water Demand Forecast Modeling ai IIT Kanpur Using Artificial Neural Networks," IEEE Transactions on Water Resources Management, vol. 15, no.1, pp.299-321, Aug 2001.

[27] H.R. Maier and G.C. Dandy, "Neural networks for the prediction and forecasting of water resources variables: a review of modeling issues and applications," Environmental Modeling and Software, pp.101-124, Jan 2000.

[28] Baughman, D.R. and Liu, Y.A., (1990).Neural Networks in Bioprocessing and Chemical Engineering. Academic Press, New York.

[29] Hubick, K.T., (1992). Artificial neural networks in Australia. Department of Industry, Technology and Commerce, Commonwealth of Australia, Canberra.

[30] Crespo, J. L. and Mora, E., (1993). Drought estimation with neural networks. Advances in Engineering Software, 18, p.167-170.

[31] Karunanithi, N., Grenney, W. J., Whiley, B., and Bovee, K., (1994). Neural Networks for River Flow Prediction. Journal Computing in Civil Engineering,8, p.201-209.

[32] Hsu, K., Gupta, H. V. and Sorooshian, S., (1995). Artificial neural network modeling of the rainfall-runoff process. Wat. Resour. Res., 31, p. 2517-2530

[33] Abrahart, R. J. and Kneale, P. E., (1997). Exploring neural network rainfall-runoff modeling. BHS National Hydrology Symposium, Salford, UK, 9.35-9.43.

[34] Dawson, C. W., and Wilby, R., (1998). An artificial neural network approach to rainfall-runoff modeling. Hydro. Sci. J., 43, p.47-66.

[35] Thirumalaiah, K. and Deo, M.C., 2000. Hydrological forecasting usingartificial neural networks. ASCE Journal of Hydrologic Engineering 5, p.145-163.

[36] Cigizoglu, H.K., (2004). Estimation and forecasting of daily suspended

[37] sediment data by multi-layer perceptrons. Advances in Water Resources 27,p.185-195

★★★